

Anchorage 2335

MULTI-PURPOSE | UPHOLSTERY
PANEL | ACOUSTIC

Anchorage 2335 (66")

MULTI-PURPOSE | UPHOLSTERY
PANEL | ACOUSTIC



*Not recommended for use as Upholstery.

Specifications


Content	65% pre-consumer recycled polyester 35% post-consumer recycled polyester
Weight	2334 - 13.1 ± 1.0 oz./lin. yd. 2335 - 15.0 ± 1.0 oz./lin. yd.
Width	2334 - 54" min. useable 2335 - 66" min. useable
Repeat	none
Backing	none
Treatment	none

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

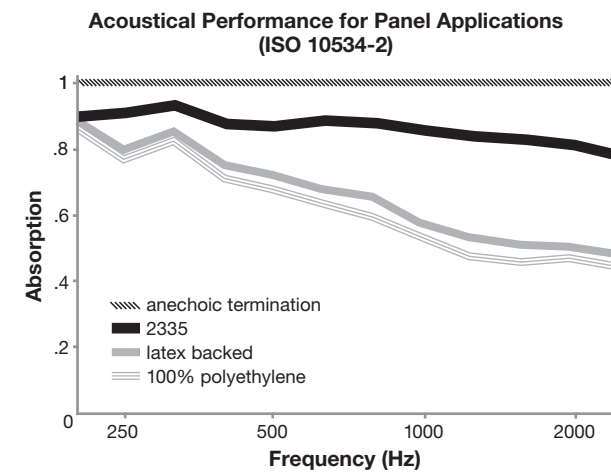

NRC of anechoic termination **1.00**
NRC of fabric in front of anechoic termination **.85**

Performance

- Colorfastness to Light (AATCC 16.3 Option 3)
Grade 4 min. at 40 hours
- Colorfastness to Crocking (AATCC 8)
Grade 4 min. dry & Grade 3 min. wet
- Breaking Strength (ASTM D5034)
275 lbf min. warp and fill
- Seam Slippage (ASTM D4034)
50 lbf min. warp and fill
- Pilling Resistance (ASTM D3511)
Class 4 min.
- Flammability
**CA Technical Bulletin 117-2013 Section 1
NFPA 260/Fabric Classification - Class I
ASTM E84 Class I or A**
- Abrasion (ASTM D4157)
250,000 double rubs min. cotton duck

Sustainability

- 100% recycled and recyclable**
Terratec is a registered trademark of Duvaltex

Miscellaneous

Proudly woven in North America supporting our local communities.

Please specify when ordering whether 54" or 66" width is needed. Dye lots may vary. Differences may also occur between corresponding colors of Anchorage 2335 and Open House 2334.

Application testing of this product is recommended. This is a directional fabric.

Visit guilfordofmaine.com for samples.

This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.

*Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Certification Marks owned by the Association for Contract Textiles, Inc.